

Cobblestone

A Product of Hardscapes USA™



Cobblestone pavers add a distinctive element to large paved areas such as driveways and streets. Cobblestone pavers are bold and add a definite look of strength.

Their raised surface adds to their unique quality appearance. For a different look, the large 5x8 stone is also available as a stand-alone unit.




Cobblestone


A Product of Hardscapes USA™

Cobblestone.....	60mm	80mm
Sq. ft. per Cube	100	86
Pcs. per Cube.....	189R/189S	144R/192S
Weight per cube (appx.).....	2775	3167
R = 5 7/16" X 8 3/16" Rectangle S = 5 7/16" X 5 7/16" Square		

Dimensions: Note: The large 5x8 stone (pictured below) is available as a stand alone unit.

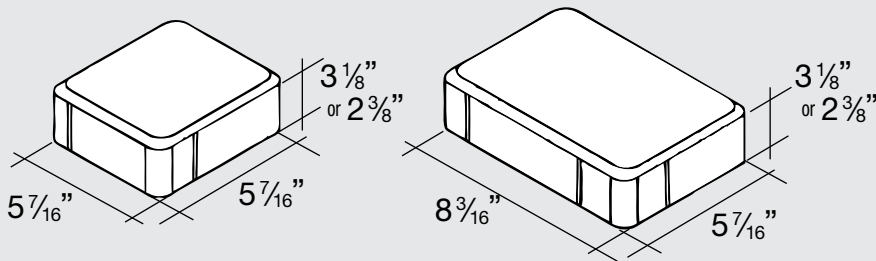

Patterns:

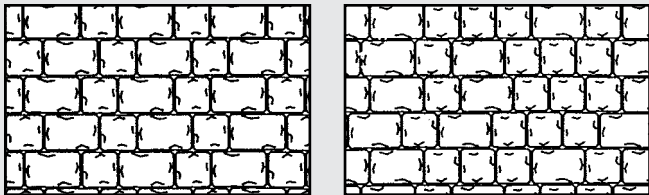

Contact manufacturer for additional patterns.

Color Selections:

Standard colors are available using both gray and white cements. **Gray Cement:** Terra Cotta, Charcoal, Buff, Dark Brown, Chestnut, Light Brown, St. Joe, O3-Orange, Red, Gray, Medium Gray, Dark Green*. **White Cement:** Sandstone, Maize, Seacrest Yellow, Light Almond, Dark Almond, Bone, Peach, Pink, Salisbury, White, Light Green*. An extensive collection of two and three color blends is available. Call **1-800-239-7421** for details.

Typical Installation:

1. Excavate subgrade material and compact the area which has been cleared. Then backfill with dense-graded aggregate (typically 4 to 6 inches for light vehicular and pedestrian traffic, increasing to 8 to 12 inches for heavy vehicular and industrial use) as directed by site engineer, architect, or landscape architect.
2. Place bedding course of sharp, normal-weight screening sand to a uniform depth of approximately 1-1/2 inches leveled to grade.
3. Install Hardscapes USA pavers on bedding course in pattern desired.
4. Where required, cut paving stones with an approved cutter to fit accurately, neatly and without damaged edges.
5. Tamp paving stones with mechanical vibrator uniformly level, true to grade and free of movement.
6. Fill voids in joints by sweeping in a fine, dry masonry sand.

* Both Dark Green and Light Green colors are special order only.

The information contained herein is accurate to the best of our knowledge, but Hardscapes USA assumes no liability whatsoever for its accuracy or completeness. Final determination of suitability of any material is the sole responsibility of the user.



HARDSCAPES USA



Product Composition:

Hardscapes USA pavers are made with zero-slump concrete, which is then hydraulically pressed while being subjected to extremely high frequency vibrations. This process results in Hardscapes USA pavers having a compressive strength of 8,000 psi or greater (ASTM C-936) and a moisture absorption of less than 5%.

About Hardscapes USA

Hardscapes USA is a manufacturer and distributor of a wide range of quality concrete products including pavers, retaining wall units, and patio products. They are produced and distributed throughout the Southeast and are used in residential, commercial, and industrial construction.

Hardscapes USA pavers are synonymous with distinctive paving applications and have earned a reputation for both quality and durability. Hardscapes USA pavers are well-suited for both the discriminating design application and the heavy-duty, functional project.